


# Top & Bottom Drive Belt Adjustable Carton Sealer

Model:

# CT-55

*Excellent for wider, taller, heavier boxes.*

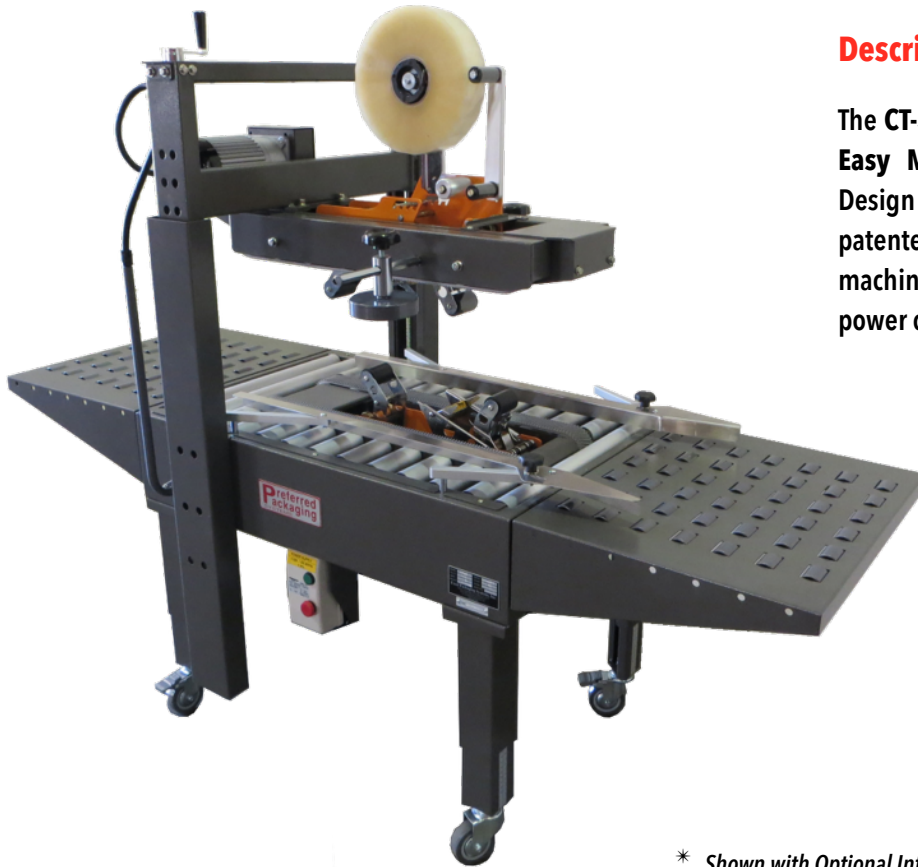


## Description

The CT-55 Semi-Automatic Uniform Carton Sealer with Easy Manual Carton Size Adjustment has a 4-Belt Design (2 top and 2 bottom) and features our new patented tape head with "Easy Thread Design." The machine comes complete with adjustable height legs, power cord and plug.

\* Shown with Optional Infeed and Discharge Roller Conveyor & Casters



**Patented "Easy Thread" Tape Design With Adjustable Box Side Guides.**

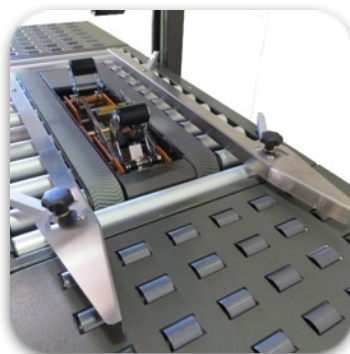

**Heavy Duty Top and Bottom 4 Drive Belt System For Positive Grip Pressure.**



**New "Piranha" Tape Head Features An Easy Thread Design with Optimizer Arm.**

The operator simply folds the top flaps of the corrugated carton and feeds it into the machine. The CT-55 applies a single tape strip to both the top and bottom of the case simultaneously. This four belt drive design is a heavy duty versatile machine designed for dependable performance and easy operation. The CT-55 can be easily adjusted in only seconds to process a different size carton. Excellent for wider, taller heavier boxes.

- “Patented” Tape Head with “Easy Thread” Design
- Interchangeable Tape Heads
- Side Pressure Rollers to Close Box Top
- 3” (72mm) Tape Heads
- Infeed Conveyor
- Exit Conveyor
- 2 Top & 2 Bottom Drive Belts -Positive Feed
- Fully Adjustable Legs From 28-32”
- Stainless Steel Frame
- Heavy Duty Locking Casters
- Spare Parts Kit

**CARTON SIZE:** LENGTH: 6” min. to Infinite  
 WIDTH: 7” min. to 20” max.  
 HEIGHT: 4.5” min. to 20” max.

**MACHINE SIZE:** 34.5’L x 27”W x 53”H

**MACHINE SPEED:** 75ft./min. up to 2000 cartons per hour. Production rate depends on carton size and operator dexterity

**ELECTRICAL:** 110 Volt, 1 Phase, 10 Amp

**WEIGHT:** 320 lbs. Shipping Weight: 370 lbs.

**MAX BOX WEIGHT:** 65lbs.

**TAPE HEAD SPECS:** 2” (48mm) Wide - 1,000 yard or 1,500 yard rolls.

**WARRANTY:** 2 year limited warranty on parts

27”

22” - 28”max

34.5”  
70”

18”

54”min - 60”max

Patented Tape Head

Height Adjustment Crank

Spring Loaded Inner Mast Assembly  
 Allows Tape Head to Float for Oversized Boxes

Dual Drive Motors


Top Flap Compression Rollers

Top & Bottom Drive Belt Assemblies  
 • 4 Belt Design  
 • Belt Speed 76 FPM  
 • (2) 1/4 HP Motors

Width Adjustment Knob

Graduated Inner Legs For Easy Bed Height Adjustment

Adjustable Friction Brake Tape Drum



CT-55 Shown Without Optional Infeed or Discharge Roller Conveyor.

Optional Infeed/Exit Conveyors

Panel Mounted On/Off Switch

Optional Casters Locking/Swivel

Shown With Optional Ansur U2 Ink Jet System